

CONCRETE FOOTING. SLOPE TO  
DRAIN AT BASE OF BOLLARD

PARKING  
LOT PAVING


- PARKING LOT PAVING

NOTE:  
ALL CONCRETE TO  
BE 3000 PSI, MIN.

- SELECT FILL

COMPACTED EARTH

## CONCRETE WALKWAY DETAIL

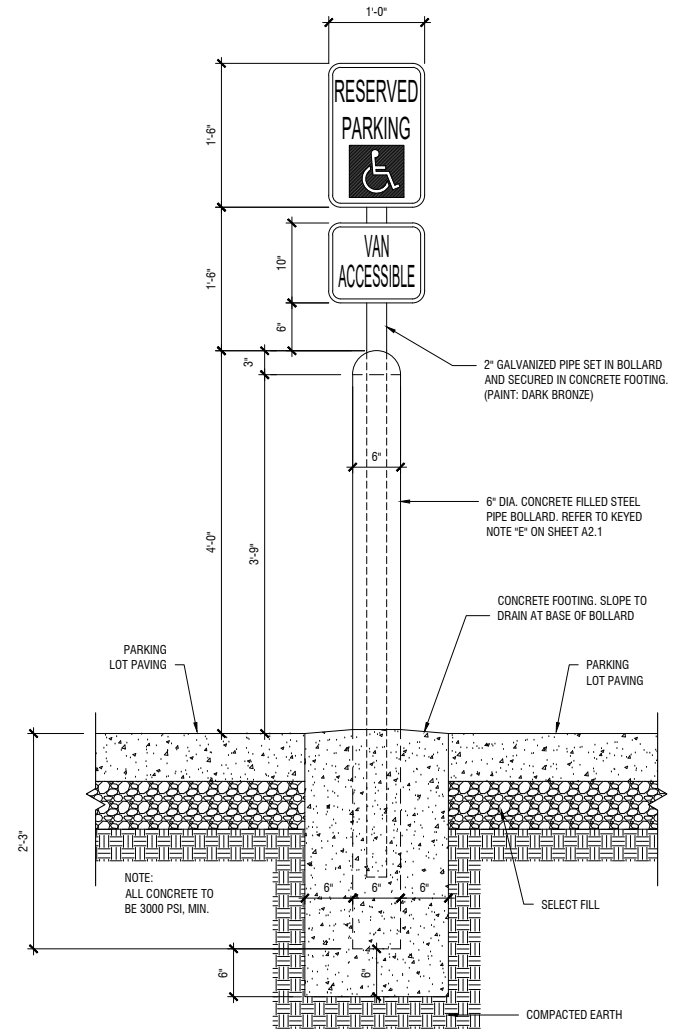

RESERVE  
PARKING



VAN  
ACCESSIBL

— 2" GALVANIZED PIPE SET IN BOLLARD  
AND SECURED IN CONCRETE FOOTING.  
(PAINT: DARK BRONZE)

— 6" DIA. CONCRETE FILLED STEEL  
PIPE BOLLARD. REFER TO KEYED  
NOTE "E" ON SHEET A2.1

CONCRETE FOOTING, SLOPE TO  
— DRAIN AT BASE OF BOLLARD

PARKING  
LOT PAVING

PARKING  
LOT PAVING

NOTE:  
ALL CONCRETE TO  
BE 3000 PSI, MIN.

SELECT FILL

— COMPACTED EARTH

ADA SIGN DETAIL ON POST

## Sketch Map

# City of Little Rock Planning & Development

Case No: Z-10169 Sketch #3

Name: Lewis Dean Taylor

Location: 7520 Geyer Springs Rd.

Title: Reduced front yard setback

