



CLR PROJECT #1-17-DR-53 MARTIN LUTHER KING JR. DRIVE DRAINAGE IMPROVEMENTS LITTLE ROCK, ARKANSAS

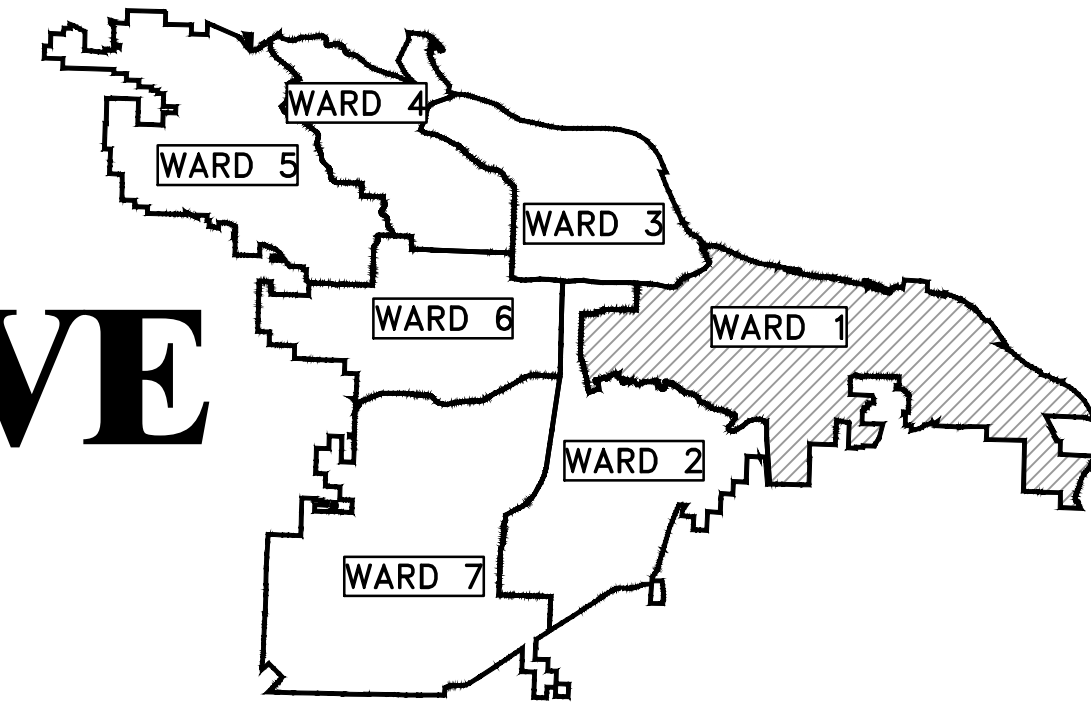

PROJECT LOCATION - WARD 1

SHEET NO.	TITLE
C1	COVER SHEET
C2	LEGEND
C3	PLAN & PROFILE - STA. 0+00 TO STA. 5+50
C4	PLAN & PROFILE - STA. 5+50 TO STA. 10+45

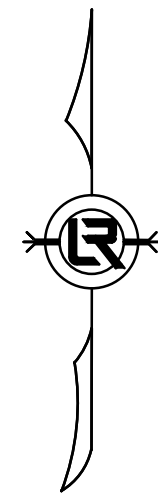

**2019-2021
BOND PROGRAM**

DEPARTMENT OF PUBLIC WORKS
CIVIL ENGINEERING
701 WEST MARKHAM STREET
LITTLE ROCK, ARKANSAS 72201



811 Know what's below.
Call before you dig.




13000 CANTRELL ROAD
LITTLE ROCK, AR 72223
PHONE 501-975-8100
WWW.ECCI.COM

PRELIMINARY- 15% SUBMITTAL


REVISIONS	DATE

CITY OF LITTLE ROCK, ARKANSAS
MLK JR. DRIVE - DRAINAGE IMPROVEMENTS

COVER SHEET



DEPARTMENT OF PUBLIC WORKS
CIVIL ENGINEERING
701 W. MARKHAM
LITTLE ROCK, ARKANSAS 72201



DRAWN BY
KP
DESIGNED
KP
CHECKED
JB
DATE
04-02-19
SCALE
NTS

PROJECT NO.
1-17-DR-53

SHEET NO.

C1

REVISIONS	DATE


CLR PROJECT# 1-17-DR-53			
MARTIN LUTHER KING JR. DRIVE - DRAINAGE			
April 2, 2019			
ITEM #	ITEM DESCRIPTION	UNIT	QUANTITY
2.01	Site Preparation (10% of Subtotal Excluding LS)	L.S.	1
3.01	Unclassified Excavation (for Sub Drain Installation)	C.Y.	226
3.40	Topsoil (6")	C.Y.	151
7.08	Alley Turnout (8" Thick)	S.F.	921
9.04	Concrete Sidewalk (4" Thick)	S.F.	4,089
13.61	Tie Into Existing Drop Inlet	EA.	4
14.01	Solid Sodding (Bermuda)	S.Y.	906
16.01	Maintenance of Traffic (5% of Subtotal Excluding LS)	L.S.	1
18.55	Water for Dust Control	GAL	200
19.01	Final Cleanup (2% of Subtotal Excluding LS)	L.S.	1
23.02	C-Ballast	TON	188
23.03	Granular Backfill (Sand)	C.Y.	18
24.06	Sediment Barrier, Silt Fence (SD1)	EA.	4
24.11	Silt Fence - Type A (SFA)	L.F.	1,000
29.10	Project Information Kiosk (PW-18)	L.S.	1
625.01	Geotextile Fabric (Type 1)	S.Y.	833
SP	4" Polyethylene Corrugated & Perforated Sub Drain	L.F.	937
202.00	Removal & Disposal of Existing Concrete Sidewalk	S.Y.	455

EXISTING	PROPOSED
IRON ROD	○ IR
PK NAIL	○ PK
R.R. SPIKE	○ RR(Sp)
CONC. MONUMENT	□ CM
WATER VALVE	⊗ WV
WATER METER	□ WM
FIRE HYDRANT	⊕ FH
GAS METER	⊕ GM
GAS VALVE	⊕ GV
CLEAN-OUT	○ CO
GUARD POST (BOLLARD)	• GP
SIGN POST	—
BENCHMARK	⊕
STORM SEWER MANHOLE	⊕
SANITARY SEWER MANHOLE	⊕
TELEPHONE MANHOLE	⊕
ELECTRIC MANHOLE	⊕
TELEPHONE BOX	⊕
ELECTRIC BOX	⊕
CABLE BOX	⊕
UTILITY POLE	⊕
GUY WIRE	—
LIGHT POLE	⊕
POST OR POLE (TYPE AS NOTED)	⊕
MAILBOX	⊕
DECIDUOUS TREE	⊕
EVERGREEN/CONIFEROUS TREE	⊕
BUSH	⊕
PROPERTY LINE	—
SETBACK LINE	—
EASEMENT LINE	—
CURB	—
FENCE	— X — X —
OVERHEAD UTILITY	— OHP — OHP —
UNDERGROUND TELEPHONE	— UGT — UGT — UGT —
UNDERGROUND ELECTRIC	— UGE — UGE — UGE —
WATER LINE	— 8"W — 8"W — 8"W —
SEWER LINE	— SAN —
GAS LINE	— GAS — GAS — GAS —
STORM SEWER/CULVERT	— 24" CMP/RCP/DIP —
CONTOUR LINE	— 650 —

CITY OF LITTLE ROCK, ARKANSAS
 MLK JR. DRIVE - DRAINAGE IMPROVEMENTS
 LEGEND

DEPARTMENT OF PUBLIC WORKS
 CIVIL ENGINEERING
 701 W. MARKHAM
 LITTLE ROCK, ARKANSAS 72201

DRAWN BY KP
DESIGNED KP
CHECKED —
DATE 04-02-19
SCALE NTS
PROJECT NO. 1-17-DR-53
SHEET NO. C2

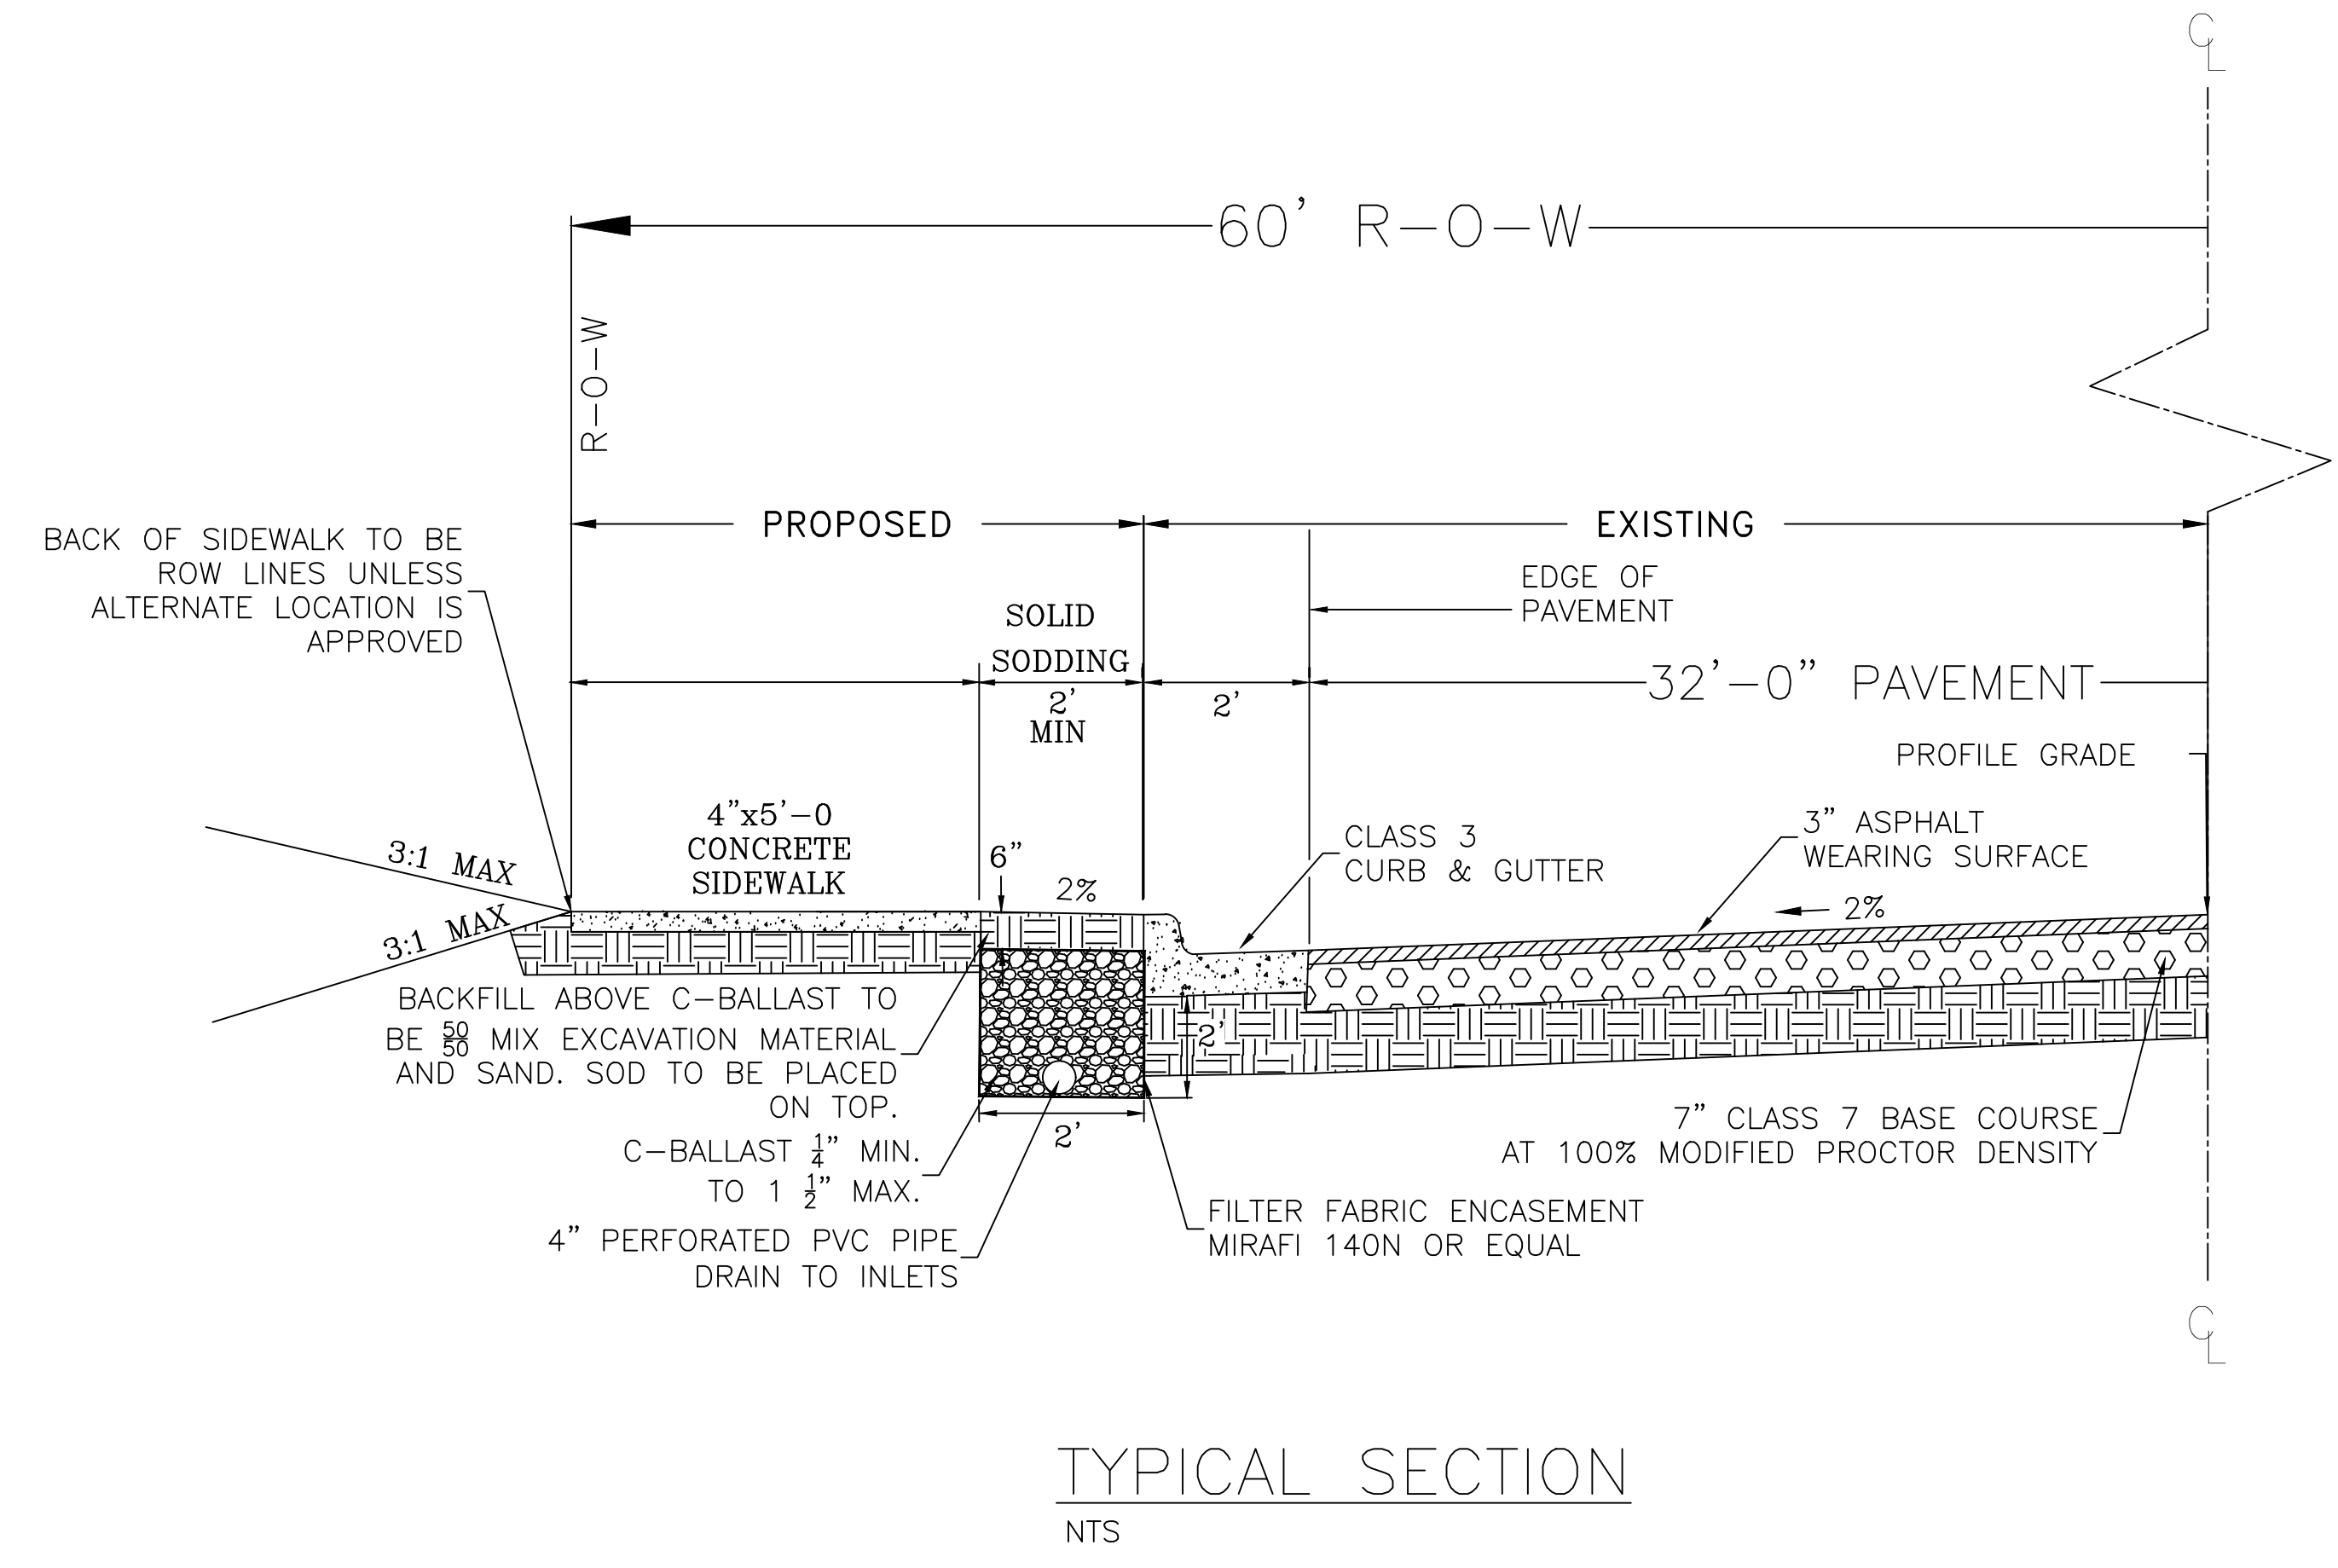


PRELIMINARY- 15% SUBMITTAL

REVISIONS	DATE




CITY OF LITTLE ROCK, ARKANSAS
MLK JR. DRIVE - DRAINAGE IMPROVEMENTS

PLAN - PROFILE
STA 0+00 TO 5+50

DEPARTMENT OF PUBLIC WORKS
CIVIL ENGINEERING
701 W. MARKHAM
LITTLE ROCK, ARKANSAS 72201






DRAWN BY
DW
DESIGNED
KP
CHECKED
RB
DATE
04-02-19
SCALE
1"=20' H, 1"=5' V
PROJECT NO.
1-17-DR-53
SHEET NO.
C3

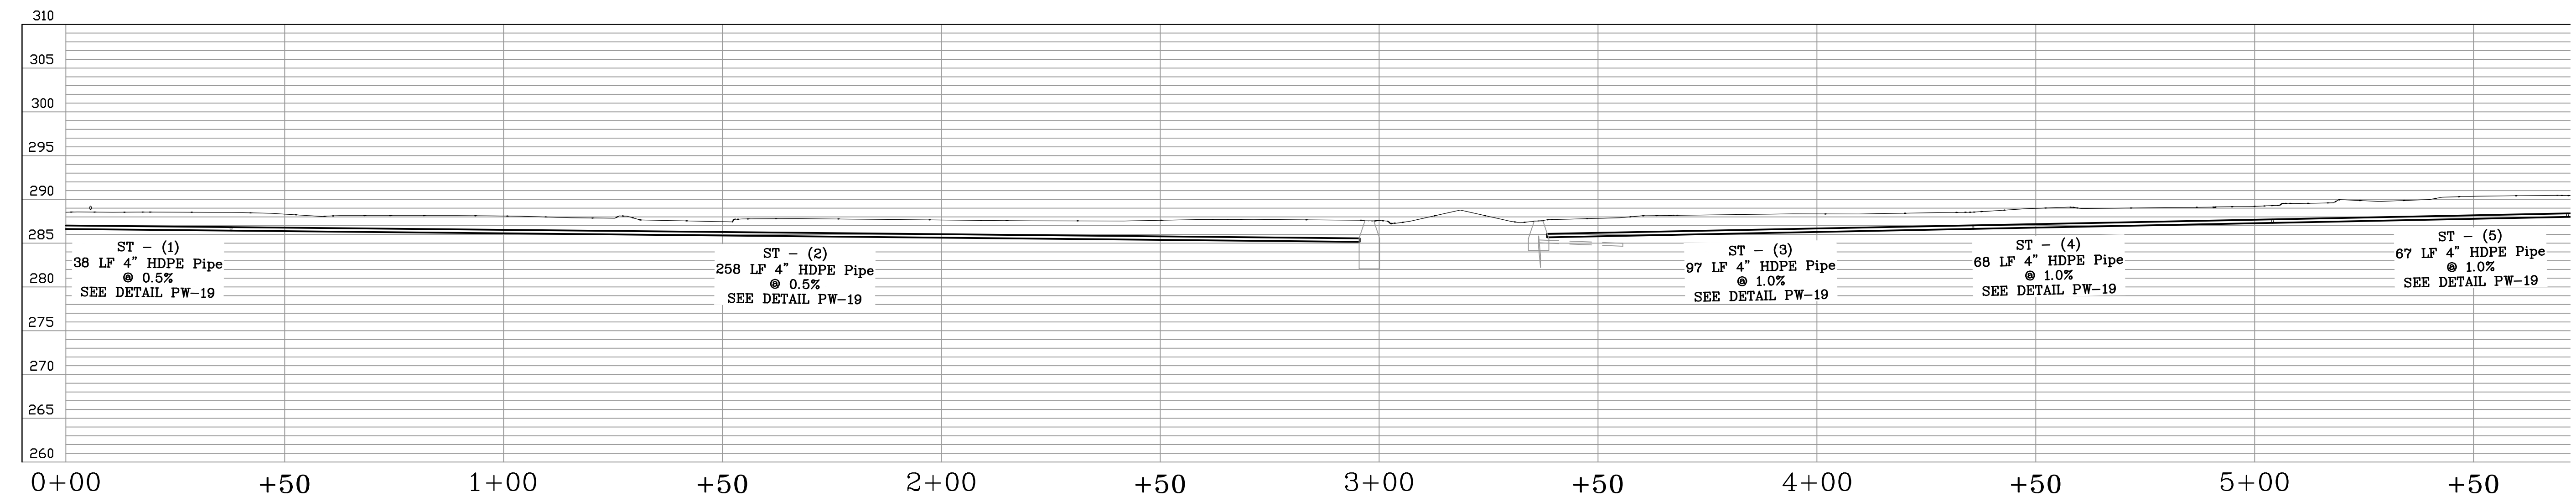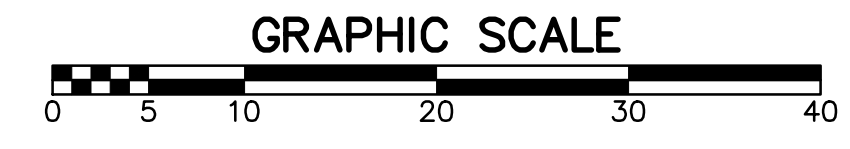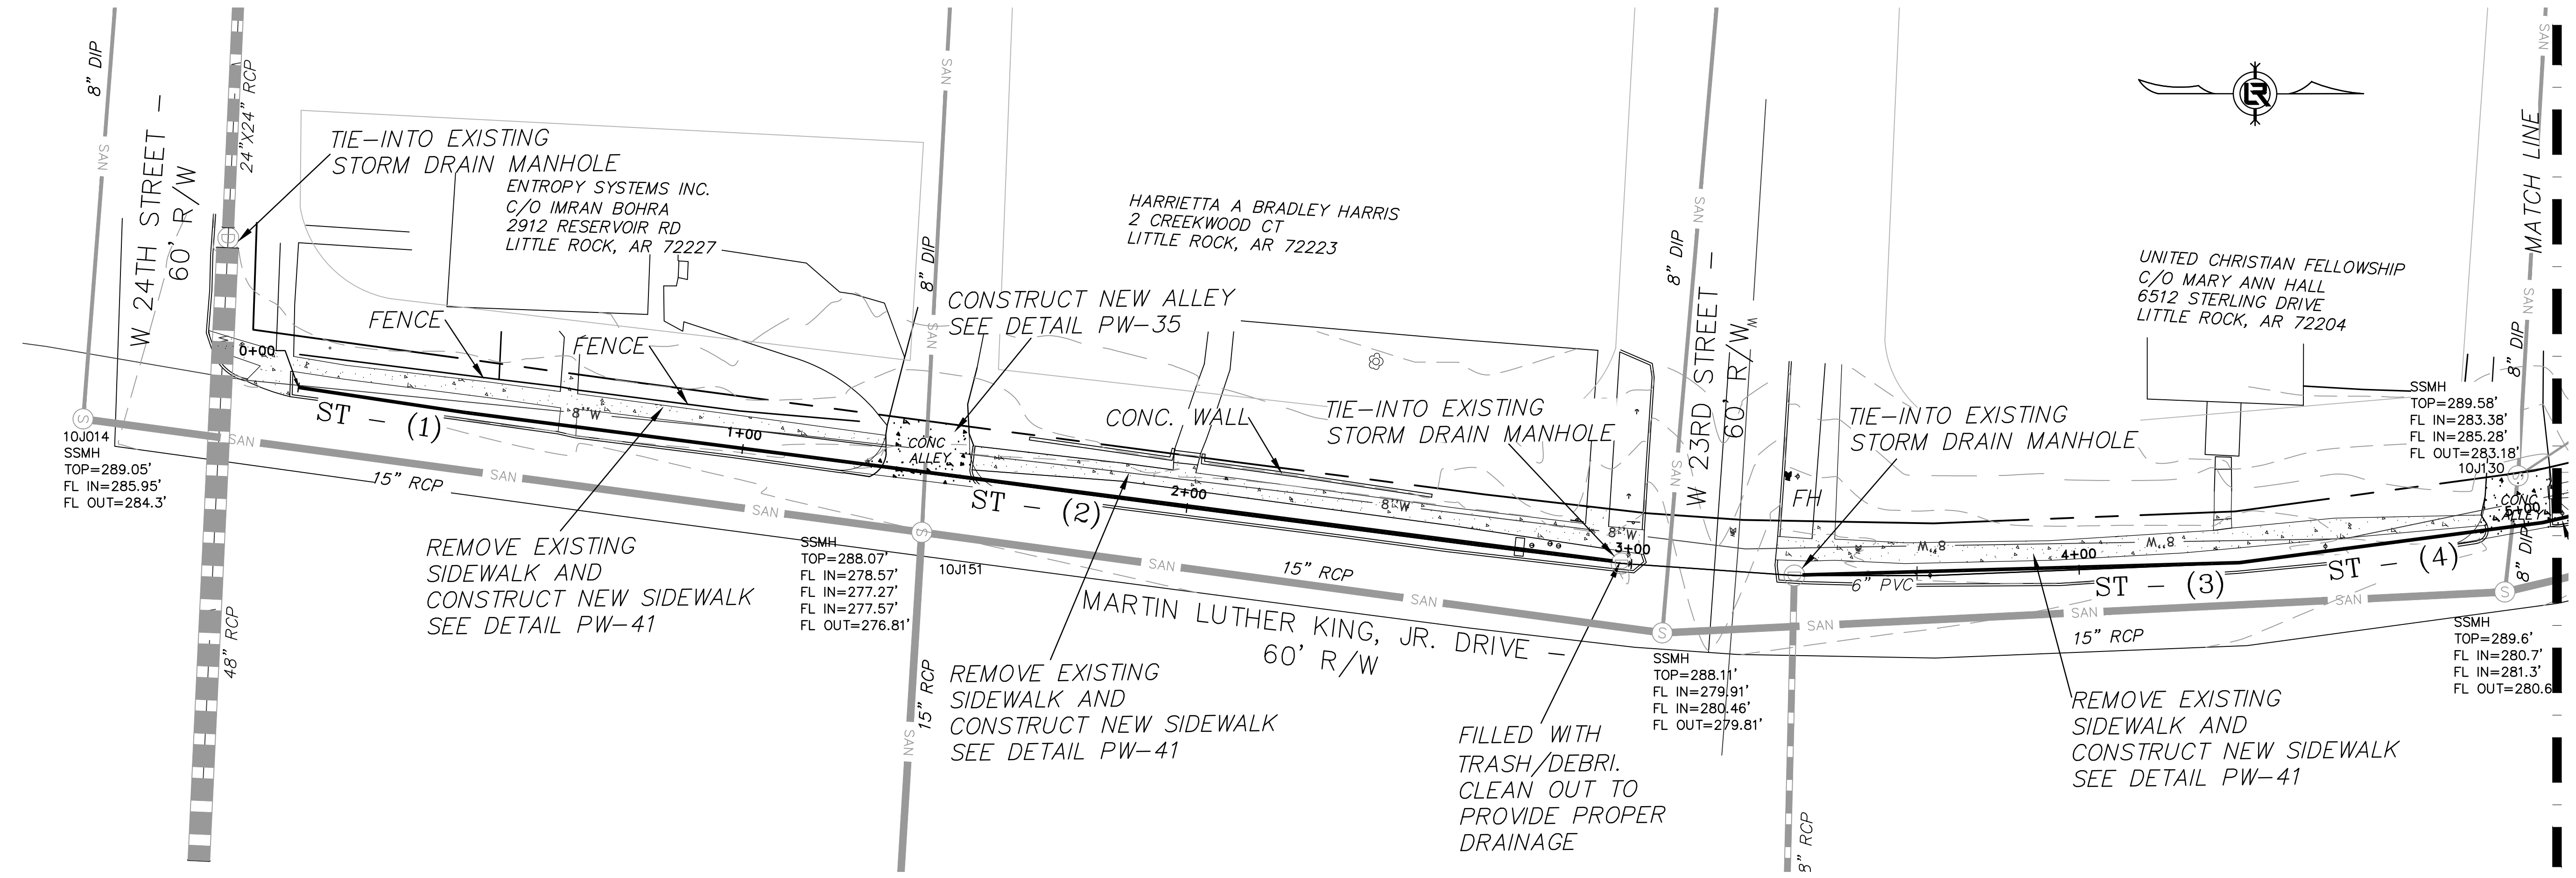

PRELIMINARY- 15% SUBMITTAL

REVISIONS	DATE

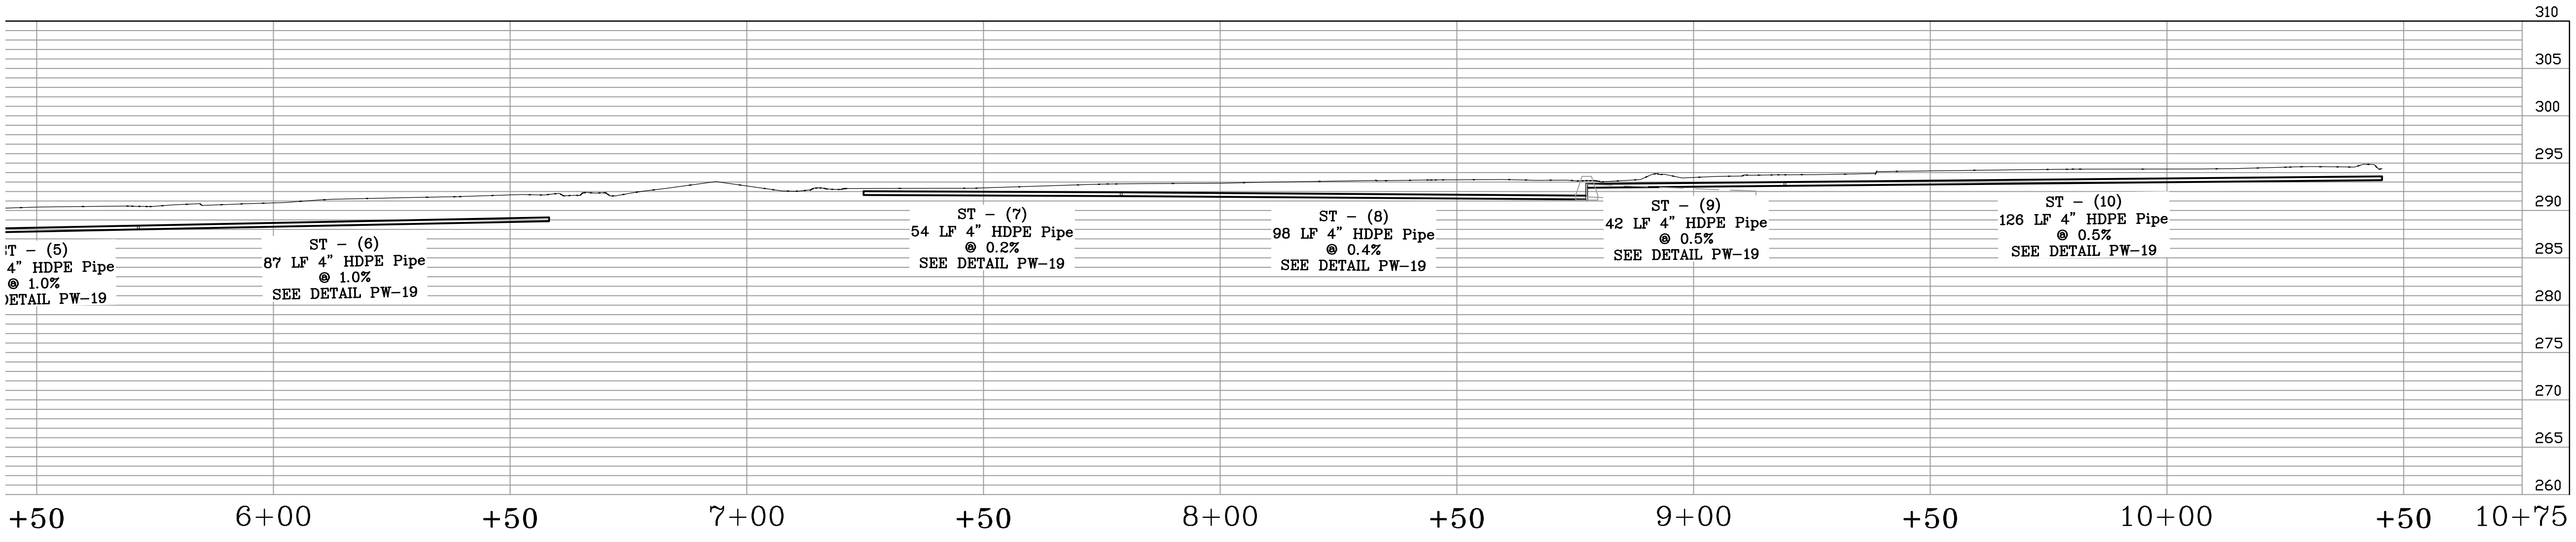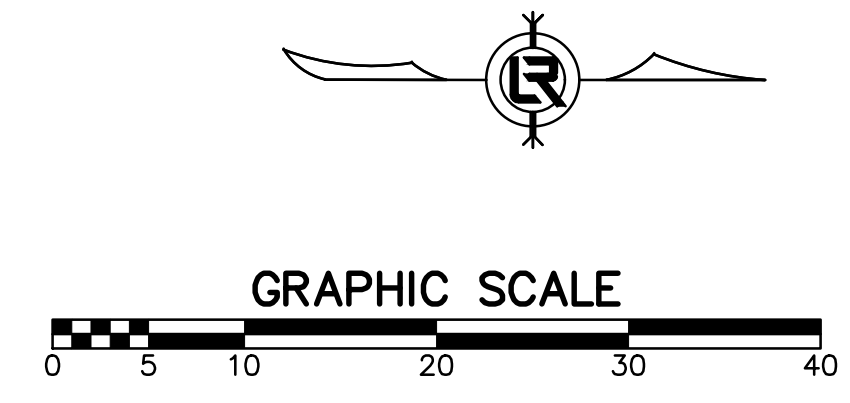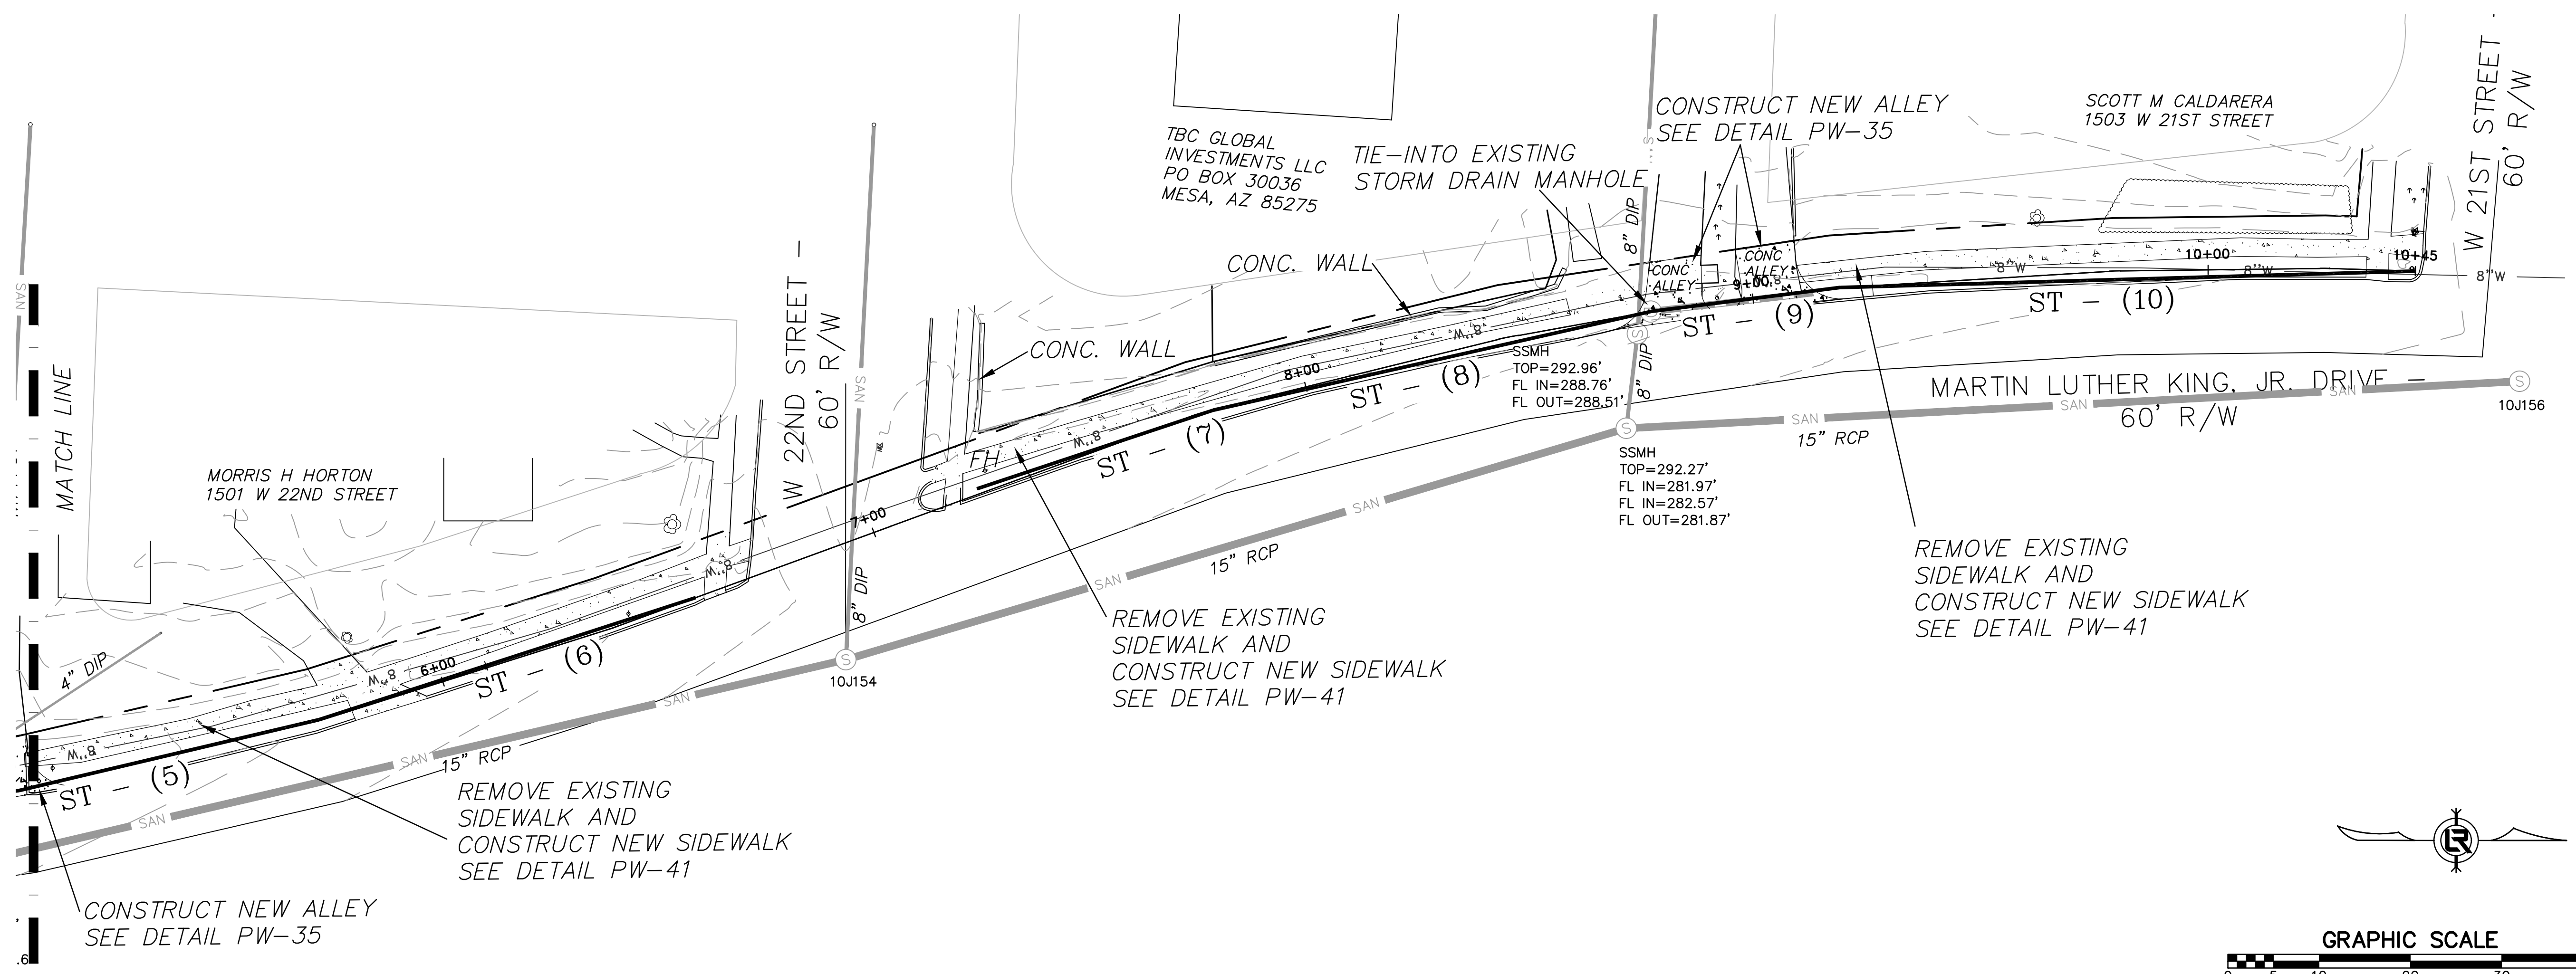

CITY OF LITTLE ROCK, ARKANSAS
MLK JR. DRIVE - DRAINAGE IMPROVEMENTS

PLAN - PROFILE
STA 5+50 TO 10+45

DEPARTMENT OF PUBLIC WORKS
CIVIL ENGINEERING
701 W. MARKHAM
LITTLE ROCK, ARKANSAS 72201

DRAWN BY
DW
DESIGNED
KP
CHECKED
RB
DATE
04-02-19
SCALE
1"=20' H, 1"=5' V
PROJECT NO.
1-17-DR-53
SHEET NO.
C4

PRELIMINARY- 15% SUBMITTAL